


ICARUS_MULTISTAND

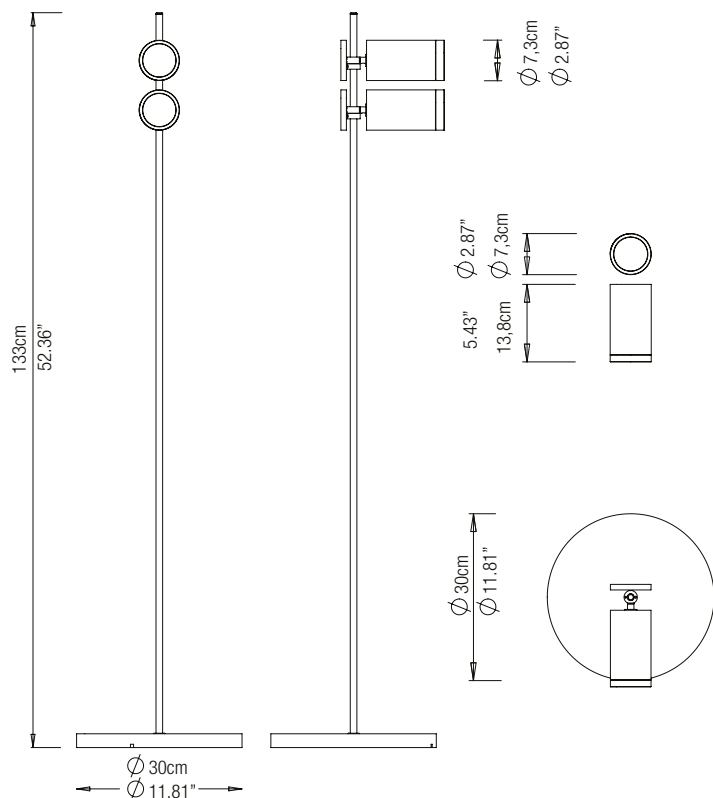


SOUND OUTPUT

- Speaker type**
2 x 2" Wide Band
- Nominal impedance**
4 Ω
- Crossover**
DSP needed
- Frequency range**
150-20.000 Hz (-6dB)
- Sensitivity (1W-1m)**
83 dB/W/m
- Recommended amplifier power**
50W (Class D)


SPECIFICATIONS

- Material**
concrete, marbles, travertine, alternative stones.
- Metal material**
stainless steel, oxidized brass, and painted steel
- Dimensions**
133h x 30Øcm
(52.36h x 11.81 Ø inches)
- Weight**
10kg (22 pounds)


Unpacking: to remove Icarus_multistand from the shipping box carefully follow these steps

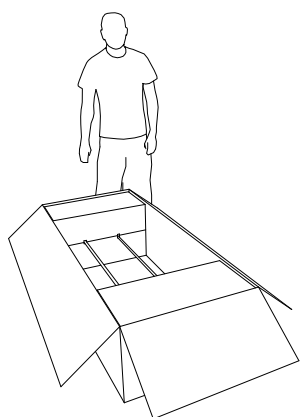

1. Icarus_MS is shipped in a box containing two sound modules secured with packing foam.

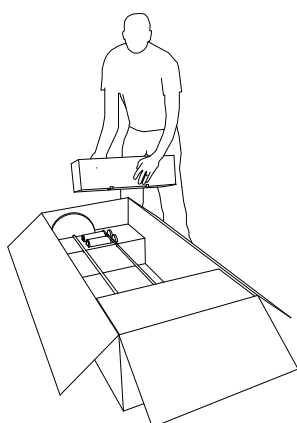

2. Remove the upper part of the foam packing protecting the modules inside the box, to release them.





3. Holding firmly the metal pole and the base gently pull the Icarus_MS out of the box.



4. Turn the module and place into position, ready for set-up and installation.


Set up: after unpacking Icarus_multistand proceed with the orientation of the two satellites.

Holding the round ring behind the satellite unscrew the joint that connects the satellite to the pole, orient it in the desired position according to the acoustic requirements and tighten it again so that to keep the satellite in the desired position. Repeat the same operation for both satellites.

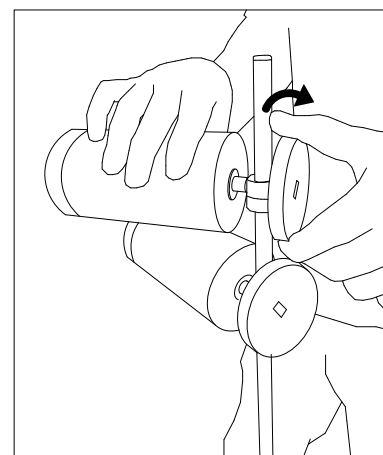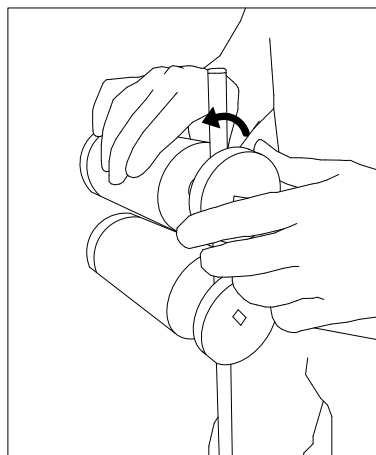


Acoustic connectivity & settings: the Icarus_multistand necessarily **requires an amplifier equipped with DSP on board**. For everything concerning the regulation of the DSP, please refer to the website www.architetturasonora.com or to your specialized dealer.

Cabling: Icarus_MS is shipped from the factory with a high performance plug/socket connector (IP68, IP69K) already attached. The plug (male ended) is connected to the cable of the sound module and the socket (female ended) will have to be connected to the cable going to the amplifier during final installation.

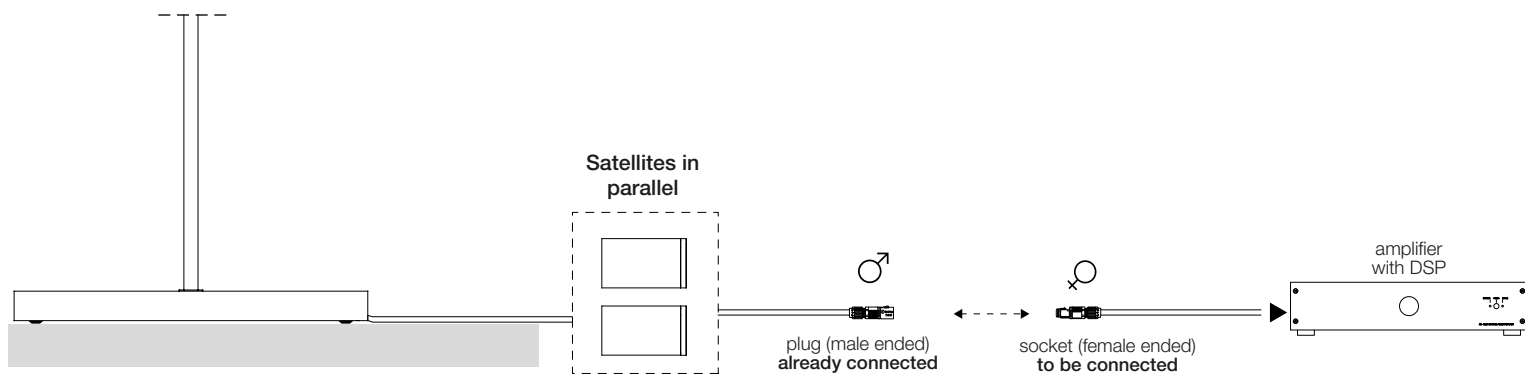


Please keep to the following instruction to connect the socket (female ended) to your cable:


- disassemble the socket as in the image below:



- connect the positive wire (+) into the hole labelled 1 (take the little pin next to the hole as a reference).
- connect the negative wire (-) into the hole labelled 2.

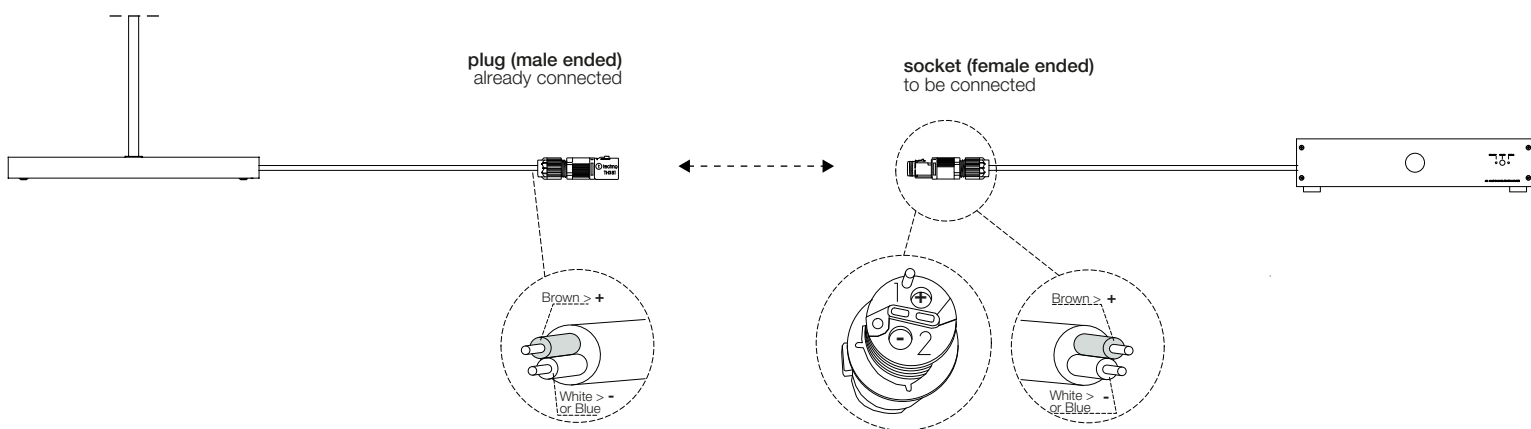

Quick push-pull connection and disconnection:

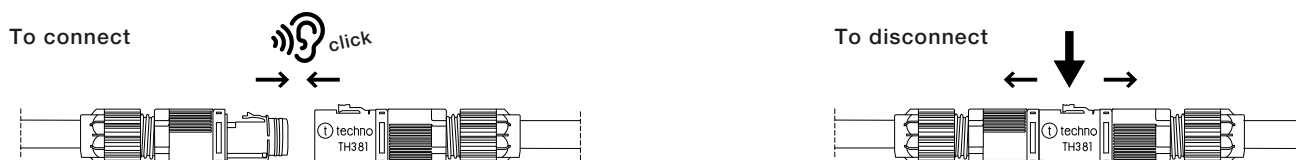

1. Push the plug connector into the socket connector until fully seated
2. A noise is the proof of correct matching
3. Apply gentle traction between plug and socket to ensure they are well hooked
4. To disconnect simply press the release button and pull.

Maintenance and care: to keep your speakers beautiful as long as possible, we warmly recommend doing maintenance at least once a year. When not in use, sound modules should be appropriately covered or stored away; heavy duty protective covers are available from AS. Please refer to the General Manual for appropriate instructions and note that any departure from our recommendations on care and cleaning, or any evidence of misuse or damages from ordinary wear and tear, will void all warranty claims.