

8. TECHNICAL SPECIFICATIONS

system	2-weg Bluetooth speaker
range	200 m ²
woofer	10" paper cone
	1,5" kapton voice coil
tweeter	1" compression driver
power amplifier RMS	150W
power amplifier peak	300W
sensitivity	92dB (+-3dB)
frequency range	40Hz - 20Khz
frequency range mic.	823Mhz - 832MHz
sources	stereo Bluetooth (TWS)
input	MIC, AUX, guitar, USB,
	SD, BT
output	AUX
wireless	Bluetooth 5.0
battery	12V 7.000 mAh
power supply	AC 100 - 240 V
weight	16kg
composition	ABS plastic
colour	black
dim. (hxxwxd)	561 x 360 x 310 mm
accessoires	2 wireless microphones
	remote control
optional	tripod SS-59



This product bears the selective sorting symbol for waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European Directive 2002/96/EC in order to be recycled or dismantled to minimize its impact on the environment. For further information, please contact your local or regional authorities.

CE I, House Of Music NV, hereby declare that the type of radio equipment ARTSOUND complies with Directive 2014/53/EU. The full text of the EU Declaration of Conformity can be found at the following internet address: <http://www.artsound.be/en/support/downloads>

Disclaimer: All trademarks are the property of their respective owners. All specifications and information are subject to change without further notice. Slight variations and differences might appear between printed photos and actual product due to product enhancement.

House Of Music NV - Legen Heirweg 23D, B-9890 Gavere


9. WARRANTY CONDITIONS

2 year warranty from date of purchase. The warranty is limited to the repair or replacement of the defective material insofar as this defect is a result of normal use and the device has not been damaged. Artsound is not responsible for any other costs that ensue as a result of the defect (e.g. transport). For details, please consult our general terms and conditions of sale.

artsound
we speak sound

U10

MANUAL

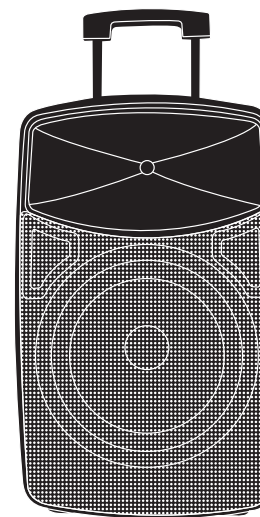

Dear Customer, congratulations on the purchase of this loudspeaker. Please read these instructions carefully and keep them for further reference.

1. WARNINGS AND SAFETY

- To prevent fire or electric shocks, the device must not be exposed to rain or humidity.
- For your own safety: to prevent electric shocks do not remove the housing.
- Do not try to repair any malfunctioning parts of the device yourself. Ask a professional expert to do this for you.

When plugged into the mains, the device remains electrically charged even when switched off.

- Be careful with loud volume for prolonged periods of time, this may cause hearing damage.

2. CONTENTS OF THE BOX

- 1 x speaker
- 1 x remote control
- 1 x user manual
- 1 x power cable
- 2 x UHF wireless microphone

3. GENERAL DESCRIPTION

The ArtSound U10 is a portable battery powered trolley speaker for music playback, vocal presentations, guitar playback and more. You can play music through Bluetooth, USB, SD card, and it's various inputs. It's high output power makes it suitable for a large audience. It can run both on mains power and the internal rechargeable battery. The wheels and handle make it very easy to transport. The U10 can also be mounted on an optional tripod. The U10 comes included with 2 wireless UHF microphones and a handy remote control. You can couple two U10 devices wirelessly through Bluetooth or by audio cable.


4. FEATURES

- 10" Active speaker box with rechargeable battery
- Input: AC100-240V ,50/60Hz, or DC 12V, or rechargeable battery 12V, 10Ah
- Woofer: 40 Oz (140 mm), 1.5" (38mm) KSV voice coil
- Tweeter: 25 mm
- Sensitivity: 10" 92dB(+/-3dB)
- Mp3, USB, SD input, with Bluetooth
- Remote control +2 mic + AC cable

5. FUNCTIONS


5.1 MEDIA PLAYER

1. SD card slot
2. Play / Pause button
3. Previous button
4. Display
5. Next button
6. Repeat button
7. Mode button
8. USB port

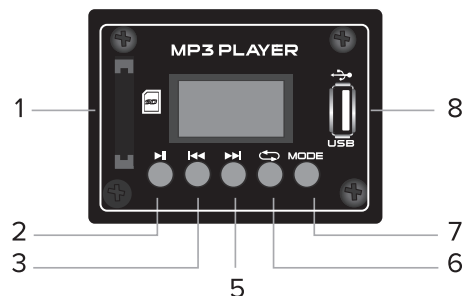


5.2 BACK PANEL

1. Total volume adjustment
2. Treble adjustment
3. Bass adjustment
4. MIC treble adjustment
5. MIC bass adjustment
6. Echo adjustment
7. MIC volume adjustment
8. Guitar volume adjustment
9. 12V battery input
10. UHF antenna
11. Audio output (RCA)
12. Aux Audio input (RCA)
13. MIC priority button
14. Wired MIC input
15. Wired MIC input
16. Guitar input
17. Power switch
18. AC power input

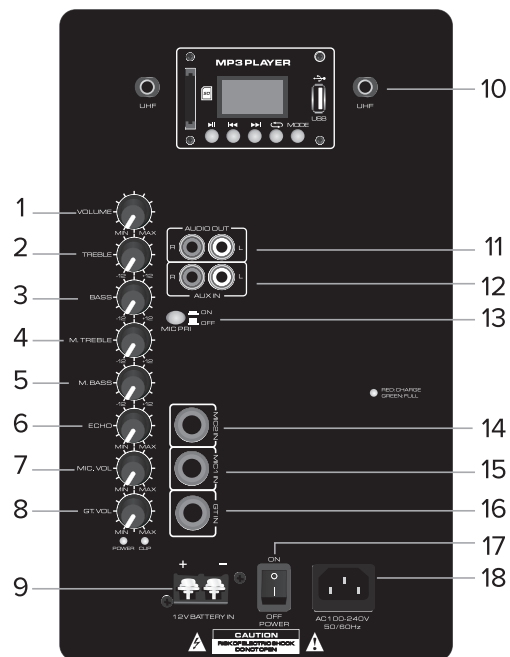


6. REMOTE CONTROL

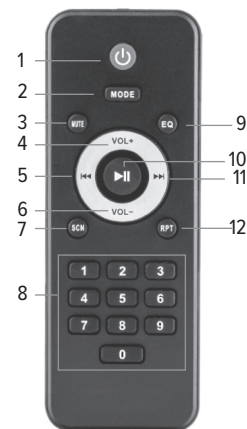

1. Power button
2. Mode button
3. Mute button
4. Volume + button
5. Previous button
6. Volume - button
7. Radio scan button (not for U10)
8. Digits buttons
9. EQ button (Normal, Rock, Pop, Classic, Jazz, News)
10. Play / Pause button
11. Next button
12. Repeat button (one / random / all)

7. WIRELESS MICROPHONES

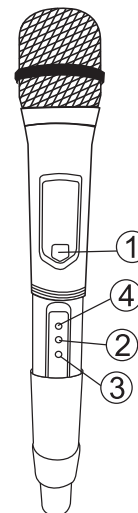

The ArtSound U10 comes with 2 UHF wireless microphones. They need 2 x AA-batteries each to function (not included). When turned on, the microphones make an automatic connection to the speaker.

1. Power Key: long press to turn on / off the microphone. Double-click to mute / unmute the microphone.
2. VOL + key: long press to display the current volume. Short press to increase the volume.
3. VOL - key: long press to display the current volume. Short press to decrease the volume.
4. SET key: manually adjust the microphone frequency, not recommended only for advanced users.